


### Overview

#### HPE ProLiant DL360 Gen10 Server

Does your data center need a secure, performance driven dense server that you can confidently deploy for virtualization, database, or high-performance computing? The powerful 2P HPE ProLiant DL360 Gen10 is redefining dense compute by delivering security, agility and unmatched expandability businesses want all packed in a dense 1U rack design.

The HPE ProLiant DL360 Gen10 Server supports the Intel® Xeon® Processor Scalable Family with up to 28 cores, plus 2666 MT/s HPE DDR4 SmartMemory supporting up to 3.0 TB max. With the added performance that 12 NVDIMMs and 10 NVMe brings, the HPE ProLiant DL360 Gen10 means business. Deploy this dense platform for diverse workloads in space constrained environments and maintain it with ease by automating the most essential server lifecycle management tasks with HPE OneView and HPE iLO 5.

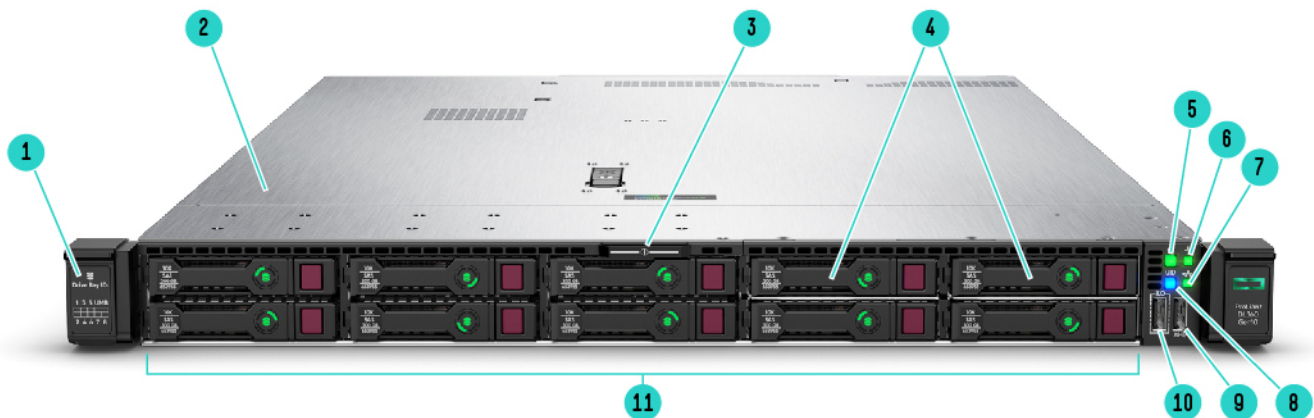

#### 8 SFF Front View – 8 SFF + 2 SFF Universal Media Bay option shown


- |   |   |
|---|---|
| 1. Drive support label                                      | 5. Power On/Standby button and system power LED |
| 2. Quick removal access panel                               | 6. Health LED                                   |
| 3. Serial no. label pull tab                                | 7. NIC status LED                               |
| 4. Universal Media Bay Options:                             | 8. UID button/LED                               |
| Option shown: +2 SFF SAS/SATA (total 10SFF)                 | 9. USB 3.0 port                                 |
| Option: +2 SFF NVMe drives                                  | 10. iLO Service Port                            |
| Option: DVD-RW or DVD-ROM + Display port & USB 2.0 port Kit | 11. Standard 8 SAS/SATA/SSD drive bays          |
| Option: +2 Dual uFF (4x M.2 cartridges)                     |   |
| Option: Display port + USB 2.0 port Kit + Blank             |   |

**NOTE:** Other options not shown.

**NOTE:** New! Rear drive option allows for an additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges).

**NOTE:** System Insight Display (SID) module will include #5-9 above (will not include #10 - iLO Service Port).

## Overview

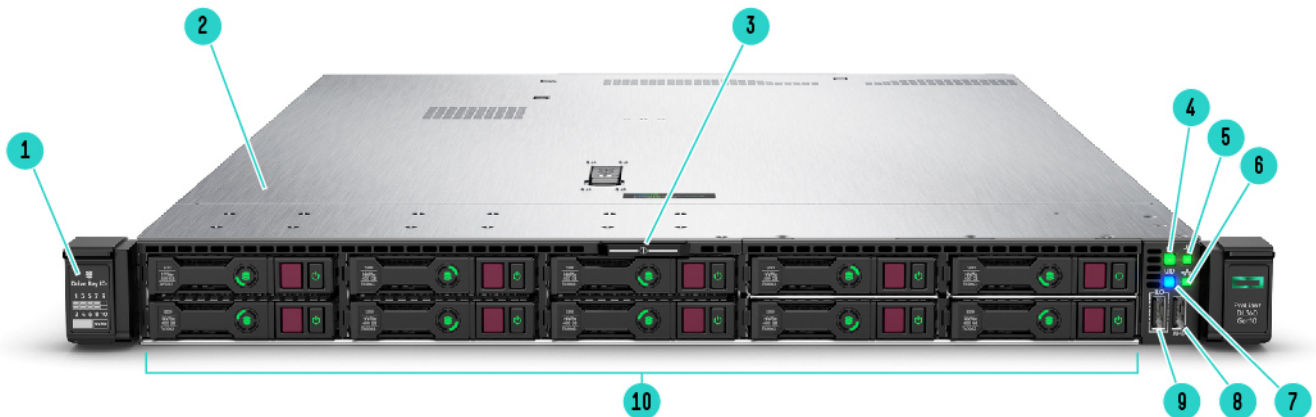


### Premium 10SFF NVMe Front View

- |   |  |
|---|--|
| 1. Drive support label                          | 6. NIC status LED  |
| 2. Quick removal access panel                   | 7. UID button/LED  |
| 3. Serial no. label pull tab                    | 8. USB 3.0 port  |
| 4. Power On/Standby button and system power LED | 9. iLO Service Port  |
| 5. Health LED                                   | 10. Max up to 10 NVMe drives (PCIe direct attached) or 8 SAS/SATA + 2 NVMe |

**NOTE:** Other options not shown.

**NOTE:** New! Rear drive option allows for an additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges).

**NOTE:** System Insight Display (SID) module will include #4-8 above (will not include #9 - iLO Service Port).

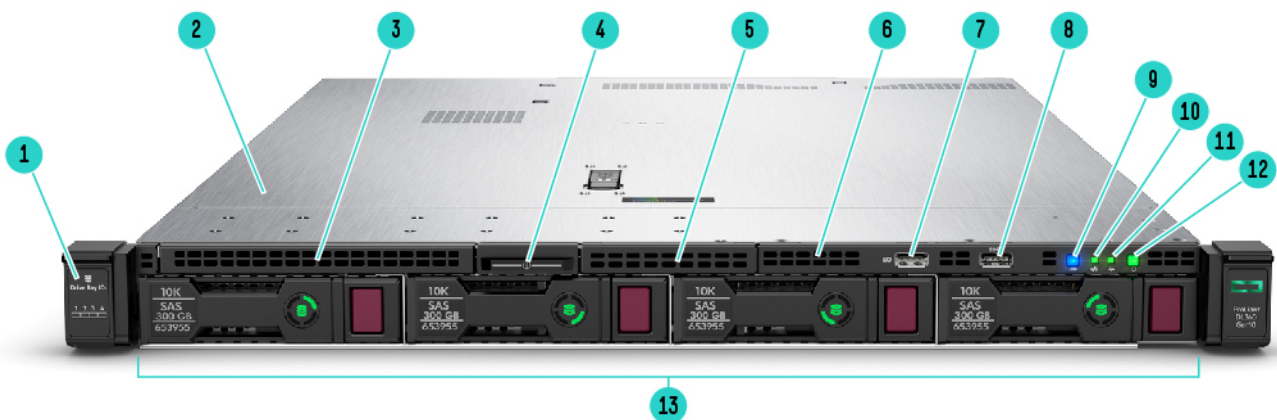


### 4 LFF Front View – Standard 4 LFF shown

- |   |  |
|---|--|
| 1. Drive support label                                    | 7. iLO Service Port                              |
| 2. Quick removal access panel                             | 8. USB 3.0 Port                                  |
| 3. Option: DVD-RW or DVD-ROM (blank shown)                | 9. UID button/LED                                |
| 4. Serial no. label pull tab                              | 10. Power On/Standby button and system power LED |
| 5. Option: Display port & USB 2.0 port Kit (blank shown)  | 11. Health LED                                   |
| 6. Option: System insight Display (SID)* - standard shown | 12. NIC status LED                               |
| <b>NOTE:</b> *This option will lose #7 iLO Service Port.  | 13. SAS/SATA/SSD drive bays                      |

**NOTE:** New! Rear drive option allows for additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges), will lose one FH PCIe slot.


## Overview

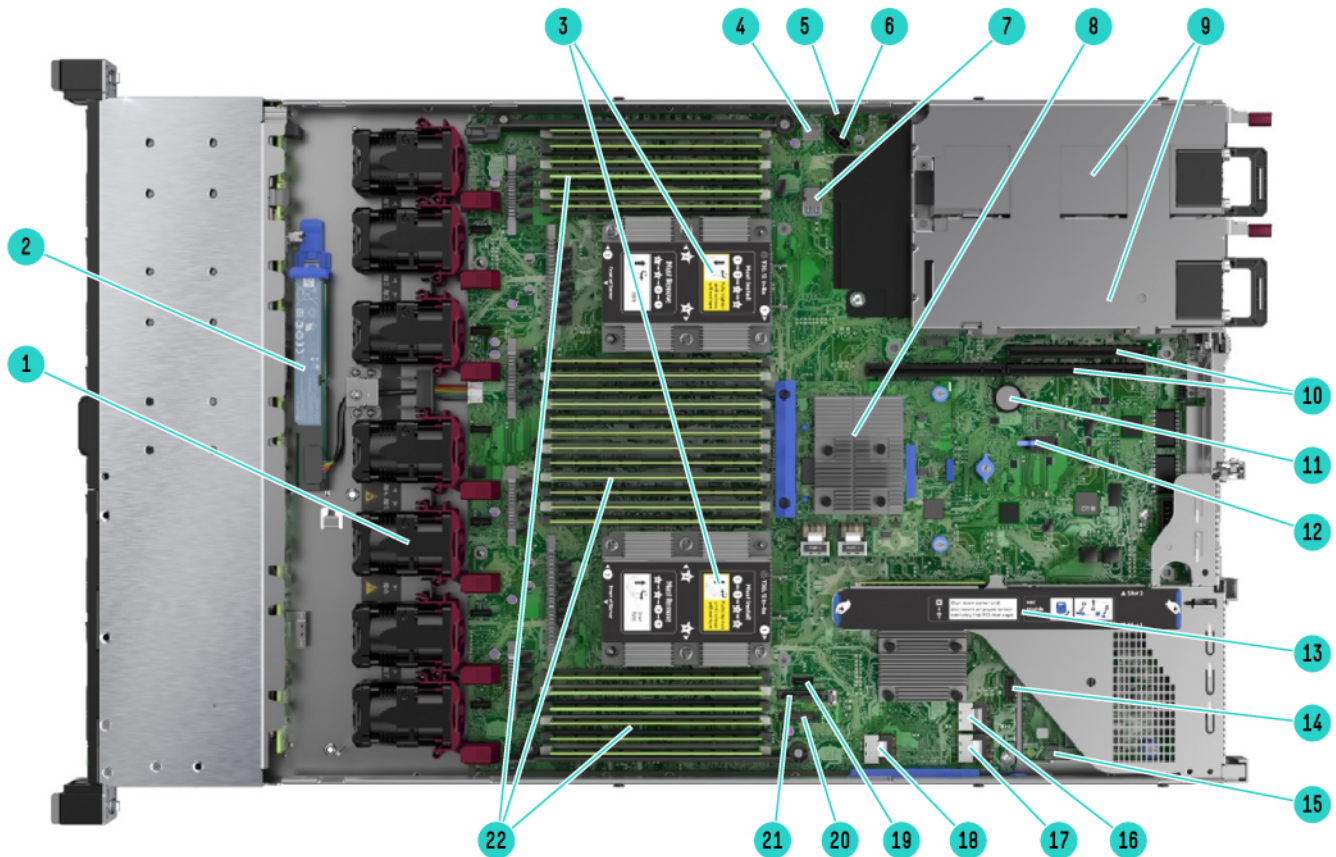

### Internal View - Standard for all DL360 Gen10

1. For 8 SFF or 4 LFF - Standard single rotor hot plug fans
  - 1 CPU – 5 standard fans
  - 2 CPUs – 7 standard fans
 \*Option: High Performance fans  
**NOTE: \*For 10 NVMe chassis - 7 High Performance.**  
**NOTE: Fans will be shipped for 1 or 2 processors.**
2. Option: Smart Storage Battery
3. Up to 2 processors (shown with standard heat sinks)
4. MicroSD card slot (Dual Micro-SD option available)
5. Option: Chassis Intrusion Detection
6. Hard Drive backplane power connector
7. Dual internal USB 3.0 connector
8. Smart Array Controller (Type -a shown)
9. Up to 2 Power Supplies for redundant power
10. Secondary (CPU2) PCIe 3.0 riser
  - Option: Low Profile x16 or
  - \*Option: Full Height x16
  - (Lose slot 2 on Primary riser)**NOTE: \*For 10 NVMe chassis – Secondary Riser is not available due to 10 x4 NVMe riser for PCIe direct attached.**
11. System Battery
12. Optional: TPM 2.0
13. Primary (CPU1) PCIe 3.0 riser
  - Standard: GPU power connector + 1x 16 and 1x 8
  - Optional: 2 SATA M.2 + 2x 16
  - \*Optional: 2x 4 NVMe + 1x 16 and 1x 8**NOTE: \*Only available on 8 SFF**
14. **Optional:** Front Display port / USB 2.0
15. FlexibleLOM (supports various NICs up to 25GbE)
16. x4 SATA port 1
17. x4 SATA port 2
18. x2 SATA port 3
19. x1 SATA port 4
20. Optical / SATA port 5
21. Front Power USB 3.0 connector
22. DDR4 DIMM slots  
(Fully populated 24 DIMMs shown)

## Overview

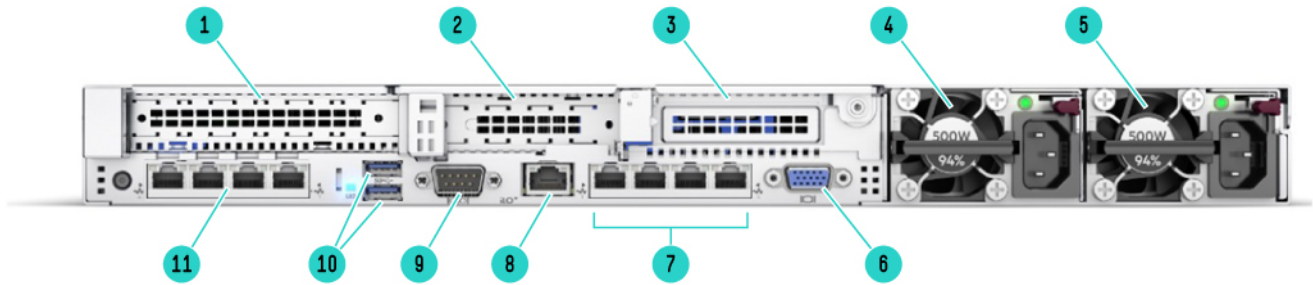

### Rear View – Standard for all DL360 Gen10

- |  |   |
|--|---|
| 1. Slot 1 PCIe 3.0<br>Option: Rear Drive +1 SFF or 1 uFF SSD (2x M.2 cartridges)<br><b>NOTE: Will lose one FH x16 PCIe slot1 with this option.</b> | 6. VGA port   |
| 2. Slot 2 PCIe 3.0   | 7. Embedded 4x 1GbE Adapter   |
| 3. Option: Slot 3 PCIe 3.0 (Requires 2 <sup>nd</sup> processor)  | 8. iLO Management Port  |
| 4. Power Supply 2  | 9. Option: Serial Port  |
| 5. Power Supply 1  | 10. USB 3.0 Ports   |
|  | 11. Option: FlexibleLOM (Shown: 4x 1GbE)<br><b>NOTE: Supports Various NICs up to 25GbE.</b> |

## What's New

- New! DL360 Gen10 Premium 10 SFF NVMe Server
- Rear Drive Option for additional 1 SFF or 1 dual uFF SSD (2x M.2 cartridges)
- Additional boot/drive options: SATA M.2; dual uFF SSD (2x M.2 cartridges)
- Intel® Xeon® Processor Scalable Family from 4 - 28 Cores; 85W - 205W; 1.8 - 3.6 GHz
- HPE DDR4 SmartMemory up to 2666 MT/s
- Security features: iLO 5 (Security Root of Trust); Chassis Intrusion Detection; TPM 2.0; Digitally Signed FW

Platform Information

Platform Information

Form Factor	1U rack
Chassis Types	8 SFF with options supporting: +2 SFF or 2 NVMe or 2 Dual uFF (4x M.2 cartridges) 10 SFF NVMe Premium 4 LFF <b>NOTE:</b> New Rear drive option available on all DL360 Gen10 chassis types for additional boot/storage: +1SFF or 1 Dual uFF (2x M.2 cartridges).
System Fans	Standard – Standard single rotor hot plug fans 1 CPU – Includes 5 standard fans 2 CPUs – Includes 7 standard fans <b>NOTE:</b> Optional High Performance Fan Kit available (includes 7 fans).



## Standard Features

### Standard Features

Processors – Up to 2 of the following depending on model.

**NOTE:** For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Intel Xeon Models	Frequency	Cores	L3 Cache	Power	UPI	DDR4 MT/s	Max Memory per socket
Platinum 8180M	2.5 GHz	28	38.50 MB	205W	2 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8180	2.5 GHz	28	38.50 MB	205W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8176M	2.1 GHz	28	38.50 MB	165W	2 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8176	2.1 GHz	28	38.50 MB	165W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8170M	2.1 GHz	26	35.75 MB	165W	2 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8170	2.1 GHz	26	35.75 MB	165W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8168	2.7 GHz	24	33.00 MB	205W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8164	2.0 GHz	26	35.75 MB	150W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8160M	2.1 GHz	24	33.00 MB	150W	2 @ 10.4 GT/s	2666 MT/s	1.5 TB
Platinum 8160	2.1 GHz	24	33.00 MB	150W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8158	3.0 GHz	12	24.75 MB	150W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8156	3.6 GHz	4	16.50 MB	105W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Platinum 8153	2.0 GHz	16	22.00 MB	125W	2 @ 10.4 GT/s	2666 MT/s	768 GB

**NOTE:** Platinum Processors:

- 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI, 8S - 3UPI @ 10.4 GT/s.
- 6-Channel DDR4 @ 2666 MT/s.
- 768 GB max memory capacity (1.5 TB on select skus).
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, advanced RAS.

Gold 6154	3.0 GHz	18	24.75 MB	200W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6152	2.1 GHz	22	30.25 MB	140W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6150	2.7 GHz	18	24.75 MB	165W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6148	2.4 GHz	20	27.50 MB	150W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6142M	2.6 GHz	16	22.00 MB	150W	2 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6142	2.6 GHz	16	22.00 MB	150W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6140M	2.3 GHz	18	24.75 MB	140W	2 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6140	2.3 GHz	18	24.75 MB	140W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6138	2.0 GHz	20	27.50 MB	125W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6136	3.0 GHz	12	24.75 MB	150W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6134M	3.2 GHz	8	24.75 MB	130W	2 @ 10.4 GT/s	2666 MT/s	1.5 TB
Gold 6134	3.2 GHz	8	24.75 MB	130W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6132	2.6 GHz	14	19.25 MB	140W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6130	2.1 GHz	16	22.00 MB	125W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6128	3.4 GHz	6	19.25 MB	115W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 6126	2.6 GHz	12	19.25 MB	125W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5122	3.6 GHz	4	16.50 MB	105W	2 @ 10.4 GT/s	2666 MT/s	768 GB
Gold 5120	2.2 GHz	14	19.25 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB
Gold 5118	2.3 GHz	12	16.50 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768 GB
Gold 5115	2.4 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2400 MT/s	768 GB

**NOTE:** Gold Processors:

- 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI @ 10.4 GT/s.
- 6-Channel DDR4 @ 2400 MT/s (SKU 5122 - supports 2666 MT/s).
- 768 GB max memory capacity (1.5 TB on select skus).
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA) (SKU 5122 - supports 2x 512 bit FMA).
- 48 lanes PCIe 3.0, advanced RAS.

## Standard Features

Silver 4116	2.1 GHz	12	16.50 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768 GB
Silver 4114	2.2 GHz	10	13.75 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768 GB
Silver 4112	2.6 GHz	4	8.25 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768 GB
Silver 4110	2.1 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768 GB
Silver 4108	1.8 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768 GB

**NOTE:** Silver Processors:

- 2 socket capable, 2S - 2UPI @ 9.6 GT/s.
- 6-Channel DDR4 @ 2400 MT/s, 768 GB max memory capacity.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS.

Bronze 3106	1.7 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2133 MT/s	768 GB
Bronze 3104	1.7 GHz	6	11.00 MB	85W	2 @ 9.6 GT/s	2133 MT/s	768 GB

**NOTE:** Bronze Processors:

- 2 socket capable, 2S - 2UPI @ 9.6 GT/s.
- 6-Channel DDR4 @ 2133 MT/s, 768 GB max memory capacity.
- Intel AVX-512 (1x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS.

### Chipset

Intel C621 Chipset

**NOTE:** For more information regarding Intel® chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

### On System Management Chipset

HPE iLO 5 ASIC

**NOTE:** Read and learn more in the [iLO QuickSpecs](#).

### Memory

Type		HPE DDR4 SmartMemory Registered (RDIMM), Load Reduced (LRDIMM)
DIMM Slots Available	24	12 DIMM slots per processor, 6 channels per processor, 2 DIMMs per channel
Maximum capacity (LRDIMM)	3.0 TB*	24 x 128 GB LRDIMM @ 2666 MT/s
Maximum capacity (RDIMM)	768 GB	24 x 32 GB RDIMM @ 2666 MT/s
NVDIMM	192 GB	12 x 16 GB NVDIMM @ 2666 MT/s

**\*NOTE:** 128 GB LRDIMM and NVDIMM will be available 2H2017.

**NOTE:** Maximum memory per socket is dependent on processor selection. Processors supporting 1.5 TB per CPU is indicated by the "M" in the processor model names (i.e. 8160M).

**NOTE:** Mixing of RDIMM and LRDIMM memory is not supported.

### Memory Protection

Advanced ECC	Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.
Online Spare	Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

**NOTE:** For more information see our [Memory RAS feature technical whitepaper](#).

## Standard Features

### Expansion Slots

Primary GPU Riser	Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
	1	PCIe 3.0	x16	x16	CPU1	Full-height; 3/4 length (up to 9.5in)
	2	PCIe 3.0	x8	x8	CPU1	Low Profile
Primary SATA M.2 Riser	Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
	1	PCIe 3.0	x16	x16	CPU 1	Full-height; 3/4 length (up to 9.5in)
	2	PCIe 3.0	x16	x16	CPU 1	Low Profile
Primary NVMe Riser	Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
	1	PCIe 3.0	x16	x16	CPU 1	Full-height; 3/4 length (up to 9.5")
	2	PCIe 3.0	x8	x8	CPU 1	Low Profile
Secondary Riser*	Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
	3	PCIe 3.0	x16	x16	CPU 2	Low Profile or Full-height; 3/4 length (up to 9.5")

**NOTE:** If secondary full height kit is installed, then primary PCIe Slot #2 cannot be used. Only 2 full height slots are supported.

### Storage Controllers

#### Software RAID

HPE Smart Array S100i SR Gen10 SW RAID

**NOTE:** HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.

**NOTE:** HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled.

**NOTE:** The S100i is a 14-port SATA controller, but only 12 ports are accessible as 2 are leveraged to support the 2 M.2 options on the Primary Riser.

#### Essential RAID Controllers

HPE Smart Array E208i-a SR Gen10 Controller

HPE Smart Array E208i-a SR G10 LH Controller

HPE Smart Array E208i-p SR Gen10 Controller

HPE Smart Array E208e-p SR Gen10 Controller

#### Performance RAID Controllers

HPE Smart Array P408i-a SR Gen10 Controller

HPE Smart Array P408i-a SR G10 LH Controller

HPE Smart Array P408i-p SR Gen10 Controller

HPE Smart Array P408e-p SR Gen10 Controller

HPE Smart Array P816i-a SR Gen10 Controller

HPE Smart Array P816i-a SR G10 LH Controller

**NOTE:** If GPGPU is needed then please order the LH controller (low profile heatsink) to allow GPU to fit in the chassis.

**NOTE:** For additional details, please see [HPE Smart Array Gen10 Controllers Data Sheet](#).



## Standard Features

### Internal Storage Devices

Optical Drive	Available on 8 SFF and 4 LFF CTO Servers as an option (DVD-ROM or DVD-RW)
Hard Drives	None ship standard

### Maximum Storage

STORAGE	CAPACITY	CONFIGURATION
Hot Plug SFF SAS	22 TB	8+2+1 x 2 TB (with optional UMB + rear drive option)
Hot Plug SFF SATA HDD	22 TB	8+2+1 x 2 TB (with optional UMB + rear drive option)
Hot Plug SFF SATA SSD	42.24 TB	8+2+1 x 3.84TB (with optional UMB + rear drive option)
Hot Plug SFF NVMe PCIe SSD	23.84 TB	10 x 2 TB NVMe + 1 SFF x 3.84 TB (with rear drive option)
Hot Plug LFF SAS	40 TB	4 x 10 TB
Hot Plug LFF SATA	40 TB	4 x 10 TB
Hot Plug LFF SATA SSD	6.4 TB	4 x 1.6 TB

### Power Supply

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

**NOTE:** Available in 94% efficiency.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

**NOTE:** Available in 94% and 96% efficiency.

**NOTE:** Also available in -48VDC and 227VAC/380VDC power inputs.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

**NOTE:** Available in 94% efficiency.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

### Interfaces

Serial	1 port - Optional
Video	1 Front - Display port (optional 8 SFF and 4 LFF only) 1 Rear - VGA port (standard on all chassis types) <b>NOTE:</b> Both ports are not active simultaneously.
Network Ports	4x 1GbE embedded NIC (standard on all chassis types) 1 FlexibleLOM slot available on all chassis types (supporting various NICs adapters)
iLO Remote Mgmt Port	1 Gb Dedicated
MicroSD Slot	1 MicroSD slot <b>NOTE:</b> The MicroSD slot is not hot-pluggable, please power down server before removal.
USB 3.0	Up to 5 total: 1 front, 2 rear, 2 internal (standard on all chassis types) +1 optional USB 2.0 front (on 8 SFF and 4 LFF only)
SID (Systems Insight Display)	Optional for all chassis types

## Standard Features

**NOTE:** Will lose iLO Service Port if selecting this option.

---

### Operating Systems and Virtualization Software

**Windows Server 2012 R2** (Most Recent Version)

**Windows Server 2016** (Most Recent Version)

**VMware ESXi 6.0 U3**

**VMware ESXi 6.5 and U1** upon release

**Red Hat Enterprise Linux (RHEL) 6.9 and 7.3**

**SUSE Linux Enterprise Server (SLES) 11 SP4 and 12 SP2**

**ClearOS**

**NOTE:** ClearOS allows you to build a fully functional server that is just right for you at no upfront cost. For more information on ClearOS, please visit <http://www.hpe.com/servers/clearos>.

**CentOS**

**NOTE:** For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<http://h20566.www2.hpe.com/portal/site/hpsc?ac.admitted=1497363250585.125225703.1938120508>.

---

### Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant
- USB 2.0 Compliant (only on optional Universal Media Bay)
- SMBIOS 3.1
- UEFI 2.6 (Unified Extensible Firmware Interface Forum)
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- TPM 1.2 and 2.0 support
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4
- Energy Star

**NOTE:** For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

---

### Graphics

Integrated video standard

- Video modes up to 1920 x 1200 @ 60 Hz (32 bpp)
- 16 MB Video Memory

HPE iLO 5 on system management memory

- 32 MB Flash
- 4 Gbit DDR3 with ECC protection

## Standard Features

---

### HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

**NOTE:** The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization

UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled.
- iSCSI Software Initiator Support.
- HTTP/HTTPS Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

---

### Embedded Management

#### HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

#### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

#### Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

#### iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

---

### Server Utilities

#### Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

#### Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

## Standard Features

<b>Smart Update</b>	Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <a href="http://www.hpe.com/info/smartupdate">http://www.hpe.com/info/smartupdate</a> .
<b>iLO Amplifier Pack</b>	Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at <a href="http://www.hpe.com/servers/iLOamplifierpack">http://www.hpe.com/servers/iLOamplifierpack</a> .
<b>HPE iLO Mobile Application</b>	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <a href="http://www.hpe.com/info/ilo/mobileapp">http://www.hpe.com/info/ilo/mobileapp</a> .
<b>RESTful Interface Tool</b>	RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <a href="http://www.hpe.com/info/resttool">http://www.hpe.com/info/resttool</a> .
<b>Scripting Tools</b>	Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <a href="http://www.hpe.com/servers/stk">http://www.hpe.com/servers/stk</a> or <a href="http://www.hpe.com/servers/powershell">http://www.hpe.com/servers/powershell</a> .
<b>HPE OneView Standard</b>	HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <a href="http://www.hpe.com/info/oneview">http://www.hpe.com/info/oneview</a> .
<b>HPE Systems Insight Manager (HPE SIM)</b>	Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <a href="http://www.hpe.com/info/hpesim">http://www.hpe.com/info/hpesim</a> .

---

## Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation (iLO 5 certification in progress)
- Common Criteria certification (iLO 5 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- iLO Security Modes including a New iLO Advanced Premium Security License
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates – components digitally signed and verified
- Secure Recovery – recover critical firmware to known good state on detection of compromised FW
- Ability to rollback firmware
- Secure erase of NAND
- TPM (Trusted Platform Module) 1.2 option

## Standard Features

- TPM (Trusted Platform Module) 2.0 option Bezel Locking Kit
  - Chassis Intrusion detection option
- 

## Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**NOTE:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

## Optional Features

### Server Management

#### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <http://www.hpe.com/servers/iloadvanced>.

#### HPE iLO Advanced Premium Security Edition

HPE iLO Advanced Premium Security Edition for iLO 5 includes iLO Advanced License plus high-end security modes, unique security capabilities, like Automatic FW recovery; Runtime FW verification, and Secure erase. Learn more about HPE iLO Advanced Premium Security Edition at: <http://www.hpe.com/servers/ilopremium>.

#### HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

#### HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

#### HPE Insight Control

HPE Insight Control is recommended for current implementation on HPE Servers to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <http://www.hpe.com/info/insightcontrol>.

### Accelerator and GPGPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).



## Optional Features

### One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance.

**<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>**

## Service and Support

### HPE Pointnext - Service and Support

#### Protect your business beyond warranty with HPE Support Services

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

---

#### Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Reduce down time and improve diagnostic accuracy with a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

Learn more about getting connected at <http://www.hpe.com/services/getconnected>.

---

#### Other related Services

##### HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

---

#### Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

---

#### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

HPE's Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

\*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

## Pre-configured Models

1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
2. Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
3. If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

	Entry Model	Base Model	Performance Model
SKU Number	867961-B21	867962-B21	867963-B21
Model Name	HPE ProLiant DL360 Gen10 3106 85W 1P 16G-2R S100i 8SFF 1x500W Entry Server	HPE ProLiant DL360 Gen10 4114 85W 1P 16G-2R P408i-a 8SFF 1x500W Base Server	HPE ProLiant DL360 Gen10 5118 105W 2P 32G-2R P408i-a 8SFF 2x800W Performance Server
Chassis	8SFF	8SFF	8SFF
Processor	3106 (8-Core, 1.7 GHz, 85W)	4114 (10-Core, 2.2 GHz, 85W)	5118 (12-Core, 2.3 GHz, 105W)
Number of Processors	One processor With standard heatsink	One processor With standard heatsink	Two processors With standard heatsink
Memory	16 GB RDIMM 2R 2666 MT/s (1x 16 GB) <b>NOTE: Runs at 2133 MT/s due to processor limitation.</b>	16 GB RDIMM 2R 2666 MT/s (1x 16 GB) <b>NOTE: Runs at 2400 MT/s due to processor limitation.</b>	32 GB RDIMM 2R 2666 MT/s (2x 16 GB) <b>NOTE: Runs at 2400 MT/s due to processor limitation.</b>
Network Controller	Embedded 4-port 1GbE	Embedded 4-port 1GbE	Embedded 4-port 1GbE + 10/25 GbE 2P 640FLR-SFP28
Storage Controller	Embedded 14-port S100i <b>NOTE: SATA only.</b>	P408i-a/2GB	P408i-a/2GB
Hard Drive	None included	None included	None included
Optical Drive	None included	None included	None included
PCIe Slots	2 PCIe: 1 x16 FH / 1 x8 LP	2 PCIe: 1 x16 FH / 1 x8 LP	3 PCIe: 1 x16 FH / 1 x8 LP + 1 x16 FH
Power Supply	1x 500W	1x 500W	2x 800W
Fans	5 - Standard	5 - Standard	7 - Standard
Management	HPE iLO 5	HPE iLO 5	HPE iLO Advanced
Rail Kit	SFF Easy Install w/o CMA		
Energy Star	Energy Star 2.1		
Form Factor	1U Rack		
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
<b>NOTE: UEFI is the standard default for all Pre-configured models.</b>			

## Pre-configured Models

	High Performance Models	
SKU Number	867964-B21	879991-B21
Model Name	HPE ProLiant DL360 Gen10 6130 125W 2P 64G-2R P408i-a Premium 10NVMe 2x800W High Perf Svr	HPE ProLiant DL360 Gen10 6130 125W 2P 64G-2R P408i-a Premium 10NVMe 2x800W High Perf Svr
Chassis	Premium 10 SFF NVMe	Premium 10 SFF NVMe
Processor	6130 (16-Core, 2.1 GHz, 125W)	6130 (16-Core, 2.1 GHz, 125W)
Number of Processors	Two processors With High Performance heatsink	Two processors With High Performance heatsink
Memory	64 GB RDIMM 2R 2666 MT/s (2x 32 GB)	64 GB RDIMM 2R 2666 MT/s (2x 32 GB)
Network Controller	Embedded 4-port 1GbE + 10/25 GbE 2P 640FLR-SFP28	Embedded 4-port 1GbE + 10/25 GbE 2P 631FLR-SFP28
Storage Controller	P408i-a/2 GB	P408i-a/2 GB
Hard Drive	None included	None included
Optical Drive	None included	None included
PCIe Slots	2 PCIe: 1 x16 FH / 1 x8 LP	2 PCIe: 1 x16 FH / 1 x8 LP
Power Supply	2x 800W	2x 800W
Fans	7 – High Performance	7 - High Performance
Management	HPE iLO Advanced	HPE iLO Advanced
Rail Kit	SFF Easy Install w/o CMA	
Energy Star	Energy Star 2.1	
Form Factor	1U Rack	
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.	
NOTE: UEFI is the standard default for all Pre-configured models.		

## Smart Buy Models

SKU Number	874457-S01		874459-S01		874458-S01		874460-S01	
Model Name	HPE ProLiant DL360 Gen10 4110 85W 1P 16G-2R P408i-a 8SFF 1x500W US Svr/S-Buy		HPE ProLiant DL360 Gen10 4112 85W 1P 16G-2R P408i-a 8SFF 1x500W US Svr/S-Buy		HPE ProLiant DL360 Gen10 4116 85W 1P 32G-2R P408i-a 8SFF 2x800W US Svr/S-Buy		HPE ProLiant DL360 Gen10 5115 85W 2P 64G-2R P408i-a 8SFF 2x800W US Svr/S-Buy	
Chassis	8SFF		8SFF		8SFF		8SFF	
Processor	4110 (8-Core, 2.1 GHz, 85W)		4112 (4-Core, 2.6 GHz, 85W)		4116 (12-Core, 2.1 GHz, 85W)		5115 (10-Core, 2.4 GHz, 85W)	
Number of Processors	One processor With standard heatsink		One processor With standard heatsink		One processor With standard heatsink		Two processors With standard heatsinks	
Memory	16GB (1x 16 GB RDIMM 2R 2666 MT/s) <b>NOTE: Runs at 2400 MT/s due to processor limitation.</b>		16GB (1x 16 GB RDIMM 2R 2666 MT/s) <b>NOTE: Runs at 2400 MT/s due to processor limitation.</b>		32GB (2x 16 GB RDIMM 2R 2666 MT/s) <b>NOTE: Runs at 2400 MT/s due to processor limitation.</b>		64GB (4x 16 GB RDIMM 2R 2666 MT/s) <b>NOTE: Runs at 2400 MT/s due to processor limitation.</b>	
Network Controller	Embedded 4-port 1GbE							
Storage Controller	P408i-a/2GB + Smart Storage Battery							
Hard Drive	None included							
Optical Drive	None included							
PCIe Slots	2 PCIe: 1 x16 FH / 1 x8 LP							
Power Supply	1x 500W		1x 500W		2x 800W		2x 800W	
Fans	5 - Standard		5 - Standard		5 - Standard		7 - Standard	
Management	HPE iLO 5							
Rail Kit	SFF Easy Install w/o CMA							
Energy Star	Energy Star 2.1							
Form Factor	1U Rack							
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.							
NOTE: UEFI is the standard default for all Smart Buy models.								

## Smart Buy Models

SKU Number	874461-S01	874462-S01	874456-S01
Model Name	HPE ProLiant DL360 Gen10 5118 105W 1P 32G-2R P408i-a 8SFF 2x800W US Svr/S-Buy	HPE ProLiant DL360 Gen10 6132 140W 1P 32G-2R P408i-a 8SFF 2x800W US Svr/S-Buy	HPE ProLiant DL360 Gen10 6136 150W 1P 32G-2R P408i-a 8SFF 2x800W US Svr/S-Buy
Chassis	8SFF	8SFF	8SFF
Processor	5118 (12-Core, 2.3 GHz, 105W)	6132 (14-Core, 2.6 GHz, 140W)	6136 (12-Core, 3.0 GHz, 150W)
Number of Processors	One processor With standard heatsink	One processor With high-performance heatsink	One processor With high-performance heatsink
Memory	32 GB RDIMM 2R 2666 MT/s (2x 16 GB) <b>NOTE: Runs at 2400 MT/s due to processor limitation.</b>	32 GB RDIMM 2R 2666 MT/s (2x 16 GB) <b>NOTE: Runs at 2666 MT/s</b>	32 GB RDIMM 2R 2666 MT/s (2x 16 GB) <b>NOTE: Runs at 2666 MT/s</b>
Network Controller	Embedded 4-port 1GbE		
Storage Controller	P408i-a/2GB + Smart Storage Battery		
Hard Drive	None included		
Optical Drive	None included		
PCIe Slots	2 PCIe: 1 x16 FH / 1 x8 LP		
Power Supply	2x 800W		
Fans	5 - Standard		
Management	HPE iLO 5		
Rail Kit	SFF Easy Install w/o CMA		
Energy Star	Energy Star 2.1		
Form Factor	1U Rack		
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
<b>NOTE: UEFI is the standard default for all Smart Buy models.</b>			



## Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model.

To ensure valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on number of drives ordered with server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information

### Step 1: Base Configuration (choose one of the following configurable models)

<b>CTO Server</b>	4 LFF	8 SFF	Premium 10 NVMe
<b>SKU Number</b>	867958-B21	867959-B21	867960-B21
<b>TAA SKU</b>	875965-B21	875966-B21	875967-B21
<b>Processor</b>	Not included as standard		
<b>DIMM Slots</b>	24-DIMM slots (12 can be used for NVDIMMs)		
<b>Storage Controller</b>	Embedded SW RAID (S100i) with 14 SATA ports Optional: Choice of HPE modular Smart Array and PCIe plug-in controller		
<b>PCIe</b>	2 PCIe slots (1 x16 FH / 1 x8 LP) Optional: 1 x16 FH or LP	2 PCIe slots (1 x16 FH / 1 x8 LP) Optional: 1 x16 FH or LP	2 PCIe slots (1 x16 FH / 1 x8 LP)
<b>Drive Cage - included</b>	4 LFF - SAS/SATA	8 SFF - SAS/SATA Optional: up to 2 NVMe or 2 Dual uFF (4x M.2 cartridges)	10 NVMe - SAS/SATA/NVME Optional: 1 Dual uFF (2x M.2 cartridges)
<b>Network Controller</b>	Embedded 4x 1GbE with optional HPE FlexibleLOM and/or standup cards		
<b>Fans</b>	1 CPU – 5 Standard Fans 2 CPU – 7 Standard Fans Optional: High Performance Fans	1 CPU – 5 Standard Fans 2 CPU – 7 Standard Fans Optional: High Performance Fans	2 CPU – 7 High Performance Fans
<b>Management</b>	HPE iLO with Intelligent Provisioning (standard) Optional: iLO Advance and OneView		
<b>USB</b>	Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 2 USB 3.0 Optional: 1 USB 2.0 (lose iLO serv. Port)		Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 2 USB 3.0

**NOTE:** HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country.

### Step 2a: Choose Processor Options (at least one FIO Processor Kit is required)

Please select one –L21 processor required below.

For second processor, please select the same processor model with –B21 from Core Options – HPE Processors section.

For example: first processor, select 876099-L21 then for second processor, select 876099-B21.

**NOTE:** For first processor, -L21 will include 5 fans, For second processor, -B21 will add 2 additional fans (for 4 LFF and 8 SFF CTO Server). 10 NVMe CTO Server will always get 7 High Performane fans regardless of 1 or 2 processors.

**NOTE:** Maximum memory capacity per processor is dependent on processor models. All processors support up to 768 GB max memory per processor except “M” model processors will support up to 1.5 TB max memory per processor.

**NOTE:** Mixing of 2 different processor models are NOT allowed.

**NOTE:** DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

## Configuration Information - Factory Integrated Models

**NOTE:** Processors with 130W or higher will ship with the High Performance heat sink plus SKUs 8156, 6128, 5122 as noted below. All other will processors will ship with the Standard heat sink.

### Processor Option Kits

HPE DL360 Gen10 Intel® Xeon-Platinum 8180M (2.5GHz/28-core/205W) FIO Processor Kit	876099-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8180 (2.5GHz/28-core/205W) FIO Processor Kit	867988-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8176M (2.1GHz/28-core/165W) FIO Processor Kit	876097-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8176 (2.1GHz/28-core/165W) FIO Processor Kit	870982-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8170M (2.1GHz/26-core/165W) FIO Processor Kit	876095-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8170 (2.1GHz/26-core/165W) FIO Processor Kit	870980-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8168 (2.7GHz/24-core/205W) FIO Processor Kit	870978-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8164 (2.0GHz/26-core/150W) FIO Processor Kit	870976-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8160M (2.1GHz/24-core/150W) FIO Processor Kit	876093-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8160 (2.1GHz/24-core/150W) FIO Processor Kit	870974-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8158 (3.0GHz/12-core/150W) FIO Processor Kit	874455-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8156 (3.6GHz/4-core/105W) FIO Processor Kit	874452-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8153 (2.0GHz/16-core/125W) FIO Processor Kit	870972-L21
HPE DL360 Gen10 Intel® Xeon-Gold 6154 (3.0GHz/18-core/200W) FIO Processor Kit	870970-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6152 (2.1GHz/22-core/140W) FIO Processor Kit	860677-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6150 (2.7GHz/18-core/165W) FIO Processor Kit	860675-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6148 (2.4GHz/20-core/150W) FIO Processor Kit	860673-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6142M (2.6GHz/16-core/150W) FIO Processor Kit	876091-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/150W) FIO Processor Kit	860669-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6140M (2.3GHz/18-core/140W) FIO Processor Kit	876089-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6140 (2.3GHz/18-core/140W) FIO Processor Kit	860667-L21
<b>NOTE:</b> Ships with High Performance Heatsink.	

## Configuration Information - Factory Integrated Models

HPE DL360 Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/125W) FIO Processor Kit	870968-L21
HPE DL360 Gen10 Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit	860691-L21
<b>NOTE: Ships with High Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 6134M (3.2GHz/8-core/130W) FIO Processor Kit	876087-L21
<b>NOTE: Ships with High Performance Heatsink.</b>	
HPE DL360 Gen10 Intel Xeon-Gold 6134 (3.2GHz/8-core/130W) FIO Processor Kit	860689-L21
<b>NOTE: Ships with High Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit	860681-L21
<b>NOTE: Ships with High Performance Heatsink.</b>	
HPE DL360 Gen10 Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) FIO Processor Kit	860687-L21
HPE DL360 Gen10 Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) FIO Processor Kit	860685-L21
<b>NOTE: Ships with High Performance Heatsink.</b>	
HPE DL360 Gen10 Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) FIO Processor Kit	860683-L21
HPE DL360 Gen10 Intel® Xeon-Gold 5122 (3.6GHz/4-core/105W) FIO Processor Kit	860679-L21
<b>NOTE: Ships with High Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit	860665-L21
HPE DL360 Gen10 Intel® Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit	860663-L21
HPE DL360 Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit	860661-L21
HPE DL360 Gen10 Intel® Xeon-Silver 4116 (2.1GHz/12-core/85W) FIO Processor Kit	874449-L21
HPE DL360 Gen10 Intel® Xeon-Silver 4114 (2.2GHz/10-core/85W) FIO Processor Kit	860657-L21
HPE DL360 Gen10 Intel® Xeon-Silver 4112 (2.6GHz/4-core/85W) FIO Processor Kit	860659-L21
HPE DL360 Gen10 Intel® Xeon-Silver 4110 (2.1GHz/8-core/85W) FIO Processor Kit	860653-L21
HPE DL360 Gen10 Intel® Xeon-Silver 4108 (1.8GHz/8-core/85W) FIO Processor Kit	860655-L21
HPE DL360 Gen10 Intel® Xeon-Bronze 3106 (1.7GHz/8-core/85W) FIO Processor Kit	860651-L21
HPE DL360 Gen10 Intel® Xeon-Bronze 3104 (1.7GHz/6-core/85W) FIO Processor Kit	860649-L21

### Step 2b: Choose Memory Options (at least one Memory Kit is required)

Please select one or more memory from below.

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to: <https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>.

**NOTE: Maximum memory capacity per processor is dependent on processor model selection or limitation.**

**NOTE: Maximum memory speed is dependent on processor model selection or limitation.**

**NOTE: A maximum of 12 NVDIMMs can be supported.**

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Memory Kit	815101-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815100-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815098-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	835955-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815097-B21

### Step 2c: Choose Power Supplies (at least one Power Supply Kit is required)

Please select one or two power supplies from below.

**NOTE: Mixing of 2 different power supplies are NOT allowed.**

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21
---	------------

Configuration Information - Factory Integrated Models

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21

Step 3: Choose Additional (FIO) Factory Integratable Options

Each of the following may be selected if desired at time of factory integration:

HPE Gen10 TPM 1.2 FIO Setting	872108-B21
-------------------------------	------------

**NOTE:** TPM 2.0 is set as default, for 1.2 TPM setting instead, please select this option.

HP Legacy FIO Mode Setting	758959-B22
----------------------------	------------

**NOTE:** UEFI is the default, this FIO part can be used for CTO to enable Legacy mode.

HPE Memory Fast Fault Tolerance FIO Kit	875293-B21
---	------------

HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU	E5Y43A
--	--------

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU	P8B31A
---	--------

Step 4: Choose Additional Options for Factory Integration from Core and Additional Option sections below

## Core Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

### HPE Unique Options

#### Risers

HPE DL360 Gen10 Low Profile Riser Kit	867982-B21
HPE DL360 Gen10 2P FH GPU Enablement Kit	867980-B21
<b>NOTE:</b> This kit is not available on the 10 NVMe model.	
HPE DL360 Gen10 SATA M.2 2280 Riser Kit	867978-B21

#### Performance Cooling Options

HPE DL360 Gen10 High Performance Heat Sink Kit	871246-B21
HPE DL360 Gen10 High Performance Fan Kit	871244-B21

#### Universal Media Bay Options

HPE DL360 Gen10 2SFF SAS/SATA Backplane Kit	867966-B21
HPE DL360 Gen10 2SFF NVMe Backplane Kit	871242-B21
HPE DL360 Gen10 2SFF SATA UFF Backplane Kit	867970-B21
HPE DL360 Gen10 8SFF Display Port/USB/Optical Drive Blank Kit	868000-B21
<b>NOTE:</b> This kit is required for Optical Drive option (8SFF model only).	
HPE DL360 Gen10 LFF Display Port and USB Kit	868004-B21

#### Optical Drive Options

HPE Mobile USB DVDRW Drive	701498-B21
<b>NOTE:</b> This kit is only supported on USB 3.0 ports only.	
HPE 9.5mm SATA DVD-ROM Jb Gen9 Kit	726536-B21
HPE 9.5mm SATA DVD-RW Jb Gen9 Kit	726537-B21
HPE DL360 Gen9 and Gen10 LFF Optical Cable Kit	766203-B21
<b>NOTE:</b> This kit is required for Optical Drive option (4LFF model only).	

#### System Insight Display Options

HPE DL360 Gen10 LFF System Insight Display Power Module Kit	867994-B21
HPE DL360 Gen10 SFF System Insight Display Power Module Kit	867996-B21

#### Rear Drive Option Kit

HPE DL360 Gen10 1SFF Rear SAS/SATA/UFF Backplane Kit	867972-B21
--	------------

#### 10 NVMe chassis Upgrade Kit

HPE DL360 Gen10 10SFF Premium Backplane Kit	867974-B21
<b>NOTE:</b> This kit is supported on the 8SFF model only.	

#### Security

HPE DL360 Gen10 Chassis Intrusion Detection Kit	867984-B21
HPE 1U Gen10 Bezel Kit	867998-B21
HPE Bezel Lock Kit	875519-B21

#### Cable Kits

HPE DL360 Gen10 SFF Internal Cable Kit	867990-B21
HPE DL360 Gen10 LFF Internal Cable Kit	873869-B21
HPE DL3xx Gen10 Rear Serial Cable Kit	873770-B21

## Core Options

### HPE Processors

HPE DL360 Gen10 Intel® Xeon-Platinum 8180M (2.5GHz/28-core/205W) Processor Kit	876099-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8180 (2.5GHz/28-core/205W) Processor Kit	867988-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8176M (2.1GHz/28-core/165W) Processor Kit	876097-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8176 (2.1GHz/28-core/165W) Processor Kit	870982-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8170M (2.1GHz/26-core/165W) Processor Kit	876095-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8170 (2.1GHz/26-core/165W) Processor Kit	870980-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8168 (2.7GHz/24-core/205W) Processor Kit	870978-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8164 (2.0GHz/26-core/150W) Processor Kit	870976-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8160M (2.1GHz/24-core/150W) Processor Kit	876093-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8160 (2.1GHz/24-core/150W) Processor Kit	870974-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8158 (3.0GHz/12-core/150W) Processor Kit	874455-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8156 (3.6GHz/4-core/105W) Processor Kit	874452-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Platinum 8153 (2.0GHz/16-core/125W) Processor Kit	870972-B21
HPE DL360 Gen10 Intel® Xeon-Gold 6154 (3.0GHz/18-core/200W) Processor Kit	870970-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6152 (2.1GHz/22-core/140W) Processor Kit	860677-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6150 (2.7GHz/18-core/165W) Processor Kit	860675-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6148 (2.4GHz/20-core/150W) Processor Kit	860673-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6142M (2.6GHz/16-core/150W) Processor Kit	876091-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6142 (2.6GHz/16-core/150W) Processor Kit	860669-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6140M (2.3GHz/18-core/140W) Processor Kit	876089-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit	860667-B21
<b>NOTE:</b> Ships with Performance Heatsink.	
HPE DL360 Gen10 Intel® Xeon-Gold 6138 (2.0GHz/20-core/125W) Processor Kit	870968-B21



## Core Options

HPE DL360 Gen10 Intel® Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit	860691-B21
<b>NOTE: Ships with Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 6134M (3.2GHz/8-core/130W) Processor Kit	876087-B21
<b>NOTE: Ships with Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 6134 (3.2GHz/8-core/130W) Processor Kit	860689-B21
<b>NOTE: Ships with Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit	860681-B21
<b>NOTE: Ships with Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 6130 (2.1GHz/16-core/125W) Processor Kit	860687-B21
HPE DL360 Gen10 Intel® Xeon-Gold 6128 (3.4GHz/6-core/115W) Processor Kit	860685-B21
<b>NOTE: Ships with Performance Heatsink.</b>	
HPE DL360 Gen10 Intel® Xeon-Gold 6126 (2.6GHz/12-core/125W) Processor Kit	860683-B21
HPE DL360 Gen10 Intel® Xeon-Gold 5122 (3.6GHz/4-core/105W) Processor Kit	860679-B21
HPE DL360 Gen10 Intel® Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit	860665-B21
HPE DL360 Gen10 Intel® Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit	860663-B21
HPE DL360 Gen10 Intel® Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit	860661-B21
HPE DL360 Gen10 Intel® Xeon-Silver 4116 (2.1GHz/12-core/85W) Processor Kit	874449-B21
HPE DL360 Gen10 Intel® Xeon-Silver 4114 (2.2GHz/10-core/85W) Processor Kit	860657-B21
HPE DL360 Gen10 Intel® Xeon-Silver 4112 (2.6GHz/4-core/85W) Processor Kit	860659-B21
HPE DL360 Gen10 Intel® Xeon-Silver 4110 (2.1GHz/8-core/85W) Processor Kit	860653-B21
HPE DL360 Gen10 Intel® Xeon-Silver 4108 (1.8GHz/8-core/85W) Processor Kit	860655-B21
HPE DL360 Gen10 Intel® Xeon-Bronze 3106 (1.7GHz/8-core/85W) Processor Kit	860651-B21
HPE DL360 Gen10 Intel® Xeon-Bronze 3104 (1.7GHz/6-core/85W) Processor Kit	860649-B21

## HPE Memory

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

**<https://www.hpe.com/docs/memory-population-rules>**

For Gen10 memory speed table, please go to: **<https://www.hpe.com/docs/memory-speed-table>**

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: **<http://www.hpe.com/docs/memory-ras-feature>**

**NOTE: Maximum memory capacity per processor is dependent on processor model selection or limitation.**

**NOTE: Maximum memory speed is dependent on processor model selection or limitation.**

**NOTE: A maximum of 12 NVDIMMs can be supported.**

## DDR4 Memory

### Registered DIMMs (RDIMMs)

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815100-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	835955-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815098-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Memory Kit	815097-B21

### Load Reduced DIMMs (LRDIMMs)

HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Memory Kit	815101-B21
---	------------

## Core Options

### HPE Drives

#### Enterprise - 12G SAS - SFF Drives

HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870763-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870765-B21
HPE 900GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty HDD	785069-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21

#### Midline - 6G SATA - LFF Drives

HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861691-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861676-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872489-B21
HPE 3TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	861693-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861678-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861752-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872491-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	846510-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861750-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	819203-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	861594-B21
HPE 10TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	857648-B21

#### Midline 6G SATA - SFF Drives

HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765453-B21
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	655710-B21
HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765455-B21

#### Midline - 12G SAS - LFF Drives

HPE 1TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	846524-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	818365-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872485-B21
HPE 3TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	846528-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	818367-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861756-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872487-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	846514-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861754-B21
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	819201-B21
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861590-B21
HPE 10TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	857644-B21

#### Midline - 12G SAS - SFF Drives

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty HDD	832514-B21
---	------------

## Core Options

HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765464-B21
HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21

### SSD Selection

To streamline the configuration process for HPE ProLiant Gen10 servers and to provide the best product availability, HPE recommends SSDs from the list located here: <http://www.hpe.com/products/recommend>.

To further assist with configuration, HPE also offers an SSD Selector Tool located here: <http://ssd.hpe.com>.

### Read Intensive - 12G SAS - SFF - Solid State Drives

HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872390-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872392-B21
HPE 3.84TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872394-B21

### Mixed Use - 12G SAS - SFF - Solid State Drives

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872374-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872376-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872382-B21
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872386-B21

### Mixed Use - 12G SAS - LFF - Solid State Drives

HPE 800GB SAS 12G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872378-B21
---	------------

### Write Intensive - PCIe/NVMe - SFF - Solid State Drives

HPE 400GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	736936-B21
HPE 800GB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	736939-B21
HPE 1.6TB NVMe x4 Lanes Write Intensive SFF (2.5in) SCN 3yr Wty SSD	764892-B21
HPE 2TB NVMe x4 Lanes Write Intensive SFF(2.5in) SCN 3yr Wty SSD	764894-B21

### Write Intensive - 6G SATA - SFF - Solid State Drives

HPE 400GB 6G SATA Write Intensive-2 SFF (2.5-inch) SC SSD	872355-B21
HPE 800GB 6G SATA Write Intensive-2 SFF (2.5-inch) SC SSD	872359-B21
HPE 1.6TB 6G SATA Write Intensive-2 SFF (2.5-inch) SC SSD	872363-B21

### Write Intensive - 6G SATA - LFF - Solid State Drives

HPE 400GB 6G SATA Write Intensive-2 LFF (3.5-inch) SCC SSD	872357-B21
HPE 800GB 6G SATA Write Intensive-2 LFF (3.5-inch) SCC SSD	872361-B21
HPE 1.6TB 6G SATA Write Intensive-2 LFF (3.5-inch) SCC SSD	872365-B21

### Read Intensive - PCIe/NVMe - SFF - Solid State Drives

HPE 400GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty SSDHP 400GB NVMe PCIe Read Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	764904-B21
HPE 1.2TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty SSD	764906-B21

### Read Intensive - SATA - SFF - Solid State Drives

HPE 150GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869374-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868814-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869376-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	868818-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869378-B21
HPE 960GB 6G SATA Read Intensive SFF (2.5-inch) SC DS SSD	868822-B21
HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869384-B21
HPE 1.6TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869386-B21
HPE 1.92TB 6G SATA Read Intensive SFF (2.5-inch) SC DS SSD	868826-B21
HPE 3.84TB 6G SATA Read Intensive SFF (2.5-inch) SC DS SSD	868830-B21

## Core Options

### Read Intensive - SATA - LFF - Solid State Drives

HPE 480GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	869380-B21
HPE 1.6TB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	869388-B21

### Mixed Use - PCIe/NVMe - SFF - Solid State Drives

HPE 400GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765034-B21
HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765036-B21
HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765038-B21
HPE 2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty SSD	765044-B21

### Mixed Use - SATA - SFF - Solid State Drives

HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872344-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872348-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872352-B21

### Mixed Use - SATA - LFF - Solid State Drives

HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872346-B21
HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872350-B21

## M.2

### Read Intensive - M.2 – Dual uFF M.2 Kit - Solid State Drives

HPE 340GB SATA 6G Read Intensive uFF 3yr Wty Dual M.2 Kit	815605-B21
---	------------

**NOTE:** The above “Dual” uFF M.2 kit comes with the 2x M.2 cartridges and SCM carrier. The dual uFF M.2 kit requires at least one of the following option kit(s) to be supported and is external to the server.

- 867970-B21 - HPE DL360 Gen10 2SFF SATA UFF Backplane Kit (for 8SFF chassis only).
- 867972-B21 - HPE DL360 Gen10 1SFF Rear SAS/SATA/UFF Backplane Kit.

HPE 340GB SATA 6G Read Intensive uFF 3yr Wty M.2 Kit	815606-B21
--	------------

**NOTE:** The uFF M.2 Option above is for spare only, it does not come with the SCM carrier.

### Read Intensive - M.2 - Solid State Drives

HPE 340GB SATA 6G Read Intensive 3yr Wty Dual M.2 Kit	835565-B21
---	------------

**NOTE:** The above “Dual” uFF M.2 kit comes with the 2x M.2 cartridges and is needed to support this option. This option kit is internal to the server.

HPE 340GB SATA 6G Read Intensive 3yr Wty M.2 Kit	835563-B21
--	------------

**NOTE:** The uFF M.2 Option above is for spare only, it does not come with the SCM carrier.

### Read Intensive - M.2 - Solid State Drives (2280 type)

HPE 150GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875317-B21
HPE 340GB SATA 6G Read Intensive M.2 2280 3yr Wty Solid State Drive	777264-B21
HPE 480GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875319-B21

**NOTE:** The above “Dual” uFF M.2 kit comes with the 2x M.2 cartridges requires the following riser to be supported. This option kit is internal to the server.

- 867978-B21 - HPE DL360 Gen10 SATA M.2 2280 Riser Kit.

### Hard Drive Blank Kits

HPE Large Form Factor Hard Drive Blank Kit	666986-B21
HPE Small Form Factor Hard Drive Blank Kit	666987-B21

## HPE Networking

### 25 Gigabit Ethernet adapters

HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter	817753-B21
HPE Ethernet 10/25Gb 2-port 631SFP28 Adapter	817718-B21
HPE Ethernet 4x25Gb 1-port 620QSFP28 Adapter	817762-B21

## Core Options

### 10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port 562SFP+ Adapter	727055-B21
HPE Ethernet 10Gb 2-port 535T Adapter	813661-B21
HPE Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HPE Ethernet 10Gb 2-port 530T Adapter	656596-B21

### 1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port 366T Adapter	811546-B21
HPE Ethernet 1Gb 2-port 361T Adapter	652497-B21
HPE Ethernet 1Gb 2-port 332T Adapter	615732-B21
HPE Ethernet 1Gb 4-port 331T Adapter	647594-B21

### FlexibleLOM Adapters

HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter	817749-B21
HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter	817709-B21
HPE FlexFabric 10Gb 4-port 536FLR-T Adapter	764302-B21
HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HPE FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter	727054-B21
HPE Ethernet 10Gb 2-port 535FLR-T Adapter	817721-B21
HPE Ethernet 1Gb 4-port 366FLR Adapter	665240-B21

### HPE InfiniBand

HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21
HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter	825110-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter	825111-B21
HPE 100Gb 1-port OP101 QSFP28 x8 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829334-B21
HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel® Omni-Path Architecture Adapter	829335-B21

**NOTE:** For additional InfiniBand information:

<https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>

### HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

### HPE Flex Slot Platinum Hot-plug Power supplies

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21

Core Options

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot 48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21

HPE Computation and Graphics Accelerators

HPE NVIDIA Tesla P4 8GB Computational Accelerator	Q0V79A
HPE NVIDIA Quadro P4000 Graphics Accelerator	Q0V78A
HPE NVIDIA Quadro P2000 Graphics Accelerator	Q0V77A
HPE DL360 Gen10 GPU CPU1 Cable Kit	871248-B21



## Additional Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

### Embedded Management

#### HPE iLO Advanced

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates 1-server LTU	512485-B21
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity LTU	512486-B21
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking LTU	512487-B21
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates 1-server LTU	BD505A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD506A
HPE iLO Advanced including 3yr 24x7 Tech Support and Updates Tracking LTU	BD507A
HPE iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
HPE iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features	Q7E31A
HPE iLO Advanced Premium Security Flex Qty License with 1yr Support on Licensed Features	Q7E32A
HPE iLO Advanced Premium Security Edition Electronic License with 1yr Support on Licensed Features	Q7E32AAE
HPE iLO Advanced Premium Security Edition License with 3yr Support on Licensed Features	Q7E33A
HPE iLO Advanced Premium Security Flex Qty License with 3yr Support on Licensed Features	Q7E34A
HPE iLO Advanced Premium Security Edition Electronic License with 3yr Support on Licensed Features	Q7E34AAE
HPE iLO Advanced Premium Security AKA Tracking License with 1yr Support on Licensed Features	Q7E35A
HPE iLO Advanced Premium Security AKA Tracking License with 1yr Support on Licensed Features	Q7E36A

#### HPE iLO Scale-Out

HPE iLO Scale-Out 3yr 24x7 Tech Support and Updates Flexible Quantity LTU	BD776A
---	--------

### HPE Converged Infrastructure Management Software

#### HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE

#### HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView Physical Media Kit LTU	E5Y37A

**NOTE:** Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.

**NOTE:** Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning.

**NOTE:** Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>.

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>.

## Additional Options

### HPE PCIe Workload Accelerator Options

#### HPE Write Intensive PCIe Workload Accelerator

HPE 1.6TB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803197-B21
HPE 800GB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803195-B21

#### HPE Mixed Use PCIe Workload Accelerator

HPE 2.0TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803204-B21
HPE 1.6TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803202-B21
HPE 800GB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803200-B21

**NOTE:** Please see the [HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs](#) for Technical Specifications and additional information.

### HPE Security

HPE DL360 Gen10 Chassis Intrusion Detection Kit	867984-B21
HPE Bezel Lock Kit	875519-B21

### HPE Storage Controllers

For additional details, please see HPE Smart Array Gen10 Controllers Data Sheet at:  
<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00017196ENW>

#### HPE Smart Array Controllers

HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller	869083-B21
HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller	804338-B21
HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller	804405-B21
HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller	869081-B21
HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller	804331-B21
HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller	830824-B21
HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21
HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller	869079-B21
HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller	804326-B21
HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804394-B21

**NOTE:** If GPGPU is needed then please order the LH controller (low profile heatsink) to allow GPU to fit in the chassis.

HPE 96W Smart Storage Battery (up to 20 Devices/145mm Cable) Kit	875241-B21
--	------------

### HPE Cable Options

HPE DL360 Gen10 LFF Internal Cable Kit	873869-B21
HPE DL360 Gen10 SFF Internal Cable Kit	867990-B21

### HPE Storage Options

#### Emulex Fibre Channel HBAs

HPE StoreFabric SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter	Q0L13A
HPE StoreFabric SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter	Q0L14A
HPE StoreFabric SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter	Q0L11A
HPE StoreFabric SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter	Q0L12A

#### QLogic Fibre Channel HBAs

HPE StoreFabric SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter	P9D93A
---	--------

## Additional Options

HPE StoreFabric SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter	P9D94A
HPE StoreFabric SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter	P9M75A
HPE StoreFabric SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter	P9M76A

### Converged Network Adapter

HPE StoreFabric CN1100R Dual Port Converged Network Adapter	QW990A
HPE StoreFabric CN1100R 10GBASE-T Dual Port Converged Network Adapter	N3U52A
HPE StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A
HPE StoreFabric CN1200E 10GBASE-T Dual Port Converged Network Adapter	N3U51A

## HPE Rack Options

### Rail Kits

HPE 1U Gen10 SFF Easy Install Rail Kit	874543-B21
HPE 1U Gen9 and Gen10 LFF Easy Install Rail Kit	789388-B21
HP 1U CMA for Easy Install Rail Kit	734811-B21

**NOTE:** Please see the [HPE KVM Switches web page](#) for information on these products and their specifications.

**NOTE:** HPE rail kits contain telescoping rails which allow for in-rack serviceability.

**NOTE:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

### HPE Racks

**NOTE:** Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

**NOTE:** Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

**NOTE:** Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

### HPE Power Distribution Units (PDUs)

**NOTE:** Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

### HPE Uninterruptible Power Systems (UPS)

**NOTE:** To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

**NOTE:** Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.

**NOTE:** Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

Additional Options

HPE USB and SD Options

HPE Enterprise Mainstream Flash Media Kits for Memory Cards


HPE 32GB microSD Mainstream Flash Media Kit	700139-B21
HPE 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21

Memory

Memory Population guidelines

HPE Gen10 DL360 / DL380 / DL560\* Servers

2 Slots per Channel

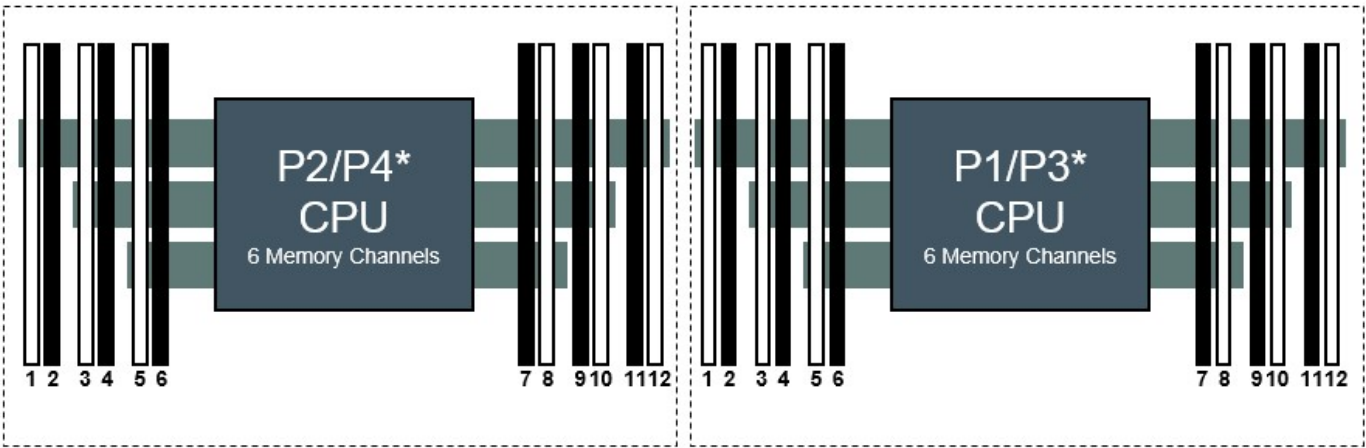

\* DL560 is a 4 socket server (uses P3, P4)

Front of Server

HPE ProLiant Gen10 12 slot per CPU DIMM Population Order												
1 DIMM							8					
2 DIMMs							8		10			
3 DIMMs							8		10		12	
4 DIMMs			3		5		8		10			
5 DIMMs *			3		5		8		10		12	
6 DIMMs	1		3		5		8		10		12	
7 DIMMs *	1		3		5		7 8		10		12	
8 DIMMs			3	4	5	6	7 8	9	10			
9 DIMMs *	1		3		5		7 8	9	10	11	12	
10 DIMMs *	1		3	4	5	6	7 8	9	10		12	
11 DIMMs *	1		3	4	5	6	7 8	9	10	11	12	
12 DIMMs	1	2	3	4	5	6	7 8	9	10	11	12	
* Unbalanced, not recommended												

General Memory Population Rules and Guidelines:

- . Install DIMMs only if the corresponding processor is installed.
- . If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- . To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- . When two processors are installed, balance the DIMMs across the two processors.
- . White DIMM slots denote the first slot to be populated in a channel.
- . Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.

## Memory

- . The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- . The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- . For details on the HPE Server Memory Options Population Rules, visit:  
<http://www.hpe.com/docs/memory-population-rules>
- . To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the **HPE DDR4 SmartMemory QuickSpecs**.

DIMM Type	Register DIMM (RDIMM)			
HPE SKU P/N	815097-B21	815098-B21	835955-B21	815100-B21
SKU Description	HPE 8GB 1Rx8 PC4-2666V-R Kit	HPE 16GB 1Rx4 PC4-2666V-R Kit	HPE 16GB 2Rx8 PC4-2666V-R Kit	HPE 32GB 2Rx4 PC4-2666V-R Kit
DIMM Rank ->	Single Rank (1R)	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)
DIMM Capacity ->	8GB	16GB	16GB	32GB
Voltage	1.2V	1.2V	1.2V	1.2V
DRAM depth [bit]	1G	2G	1G	2G
DRAM Width [bit]	x8	x4	x8	x4
DRAM Density	8Gb	8Gb	8Gb	8Gb
CAS Latency	19-19-19	19-19-19	19-19-19	19-19-19
DIMM Native Speed (MT/s)	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
<b>Intel Xeon®Platinum 81xx Processors Officially Supported Memory Speed (MT/s)</b>				
1 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
<b>Intel Xeon®Platinum 41xx/51xx/61xx Processors Officially Supported Memory Speed (MT/s)</b>				
1 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
<b>Intel Xeon®Platinum 31xx Processors Officially Supported Memory Speed (MT/s)</b>				
1 DIMM Per Channel	2133 MT/s	2133 MT/s	2133 MT/s	2133 MT/s
2 DIMM Per Channel	2133 MT/s	2133 MT/s	2133 MT/s	2133 MT/s
<b>HPE Server Memory Speed (MT/s): Intel Xeon®Platinum 81xx Processors *</b>				
1 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s	2666 MT/s	2666 MT/s
<b>HPE Server Memory Speed (MT/s): Intel Xeon®Platinum 41xx/51xx/61xx Processors *</b>				
1 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s	2400 MT/s	2400 MT/s
<b>HPE Server Memory Speed (MT/s): Intel Xeon®Platinum 31xx Processors *</b>				
1 DIMM Per Channel	2133 MT/s	2133 MT/s	2133 MT/s	2133 MT/s
2 DIMM Per Channel	2133 MT/s	2133 MT/s	2133 MT/s	2133 MT/s

**NOTE:** The maximum memory speed is a function of the memory type, memory configuration, and processor model.

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

DIMM Type	Load Reduced (LRDIMM)	
HPE SKU P/N	815101-B21	815102-B21
SKU Description	HPE 64GB 4Rx4 PC4-2666V-L Kit	HPE 128GB 8Rx4 PC4-2666V-L Kit
DIMM Rank ->	Quad Rank (4R)	Octal Rank (8R)
DIMM Capacity ->	64GB	128GB
Voltage	1.2V	1.2V

## Memory

DRAM depth [bit]	2G	2G
DRAM Width [bit]	x4	x4
DRAM Density	8Gb	8Gb
CAS Latency	19-19-19	22-19-19
DIMM Native Speed (MT/s)	2666	2666
<b>Intel Xeon® Platinum 81xx Processors Officially Supported Memory Speed (MT/s)</b>		
1 DIMM Per Channel	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s
<b>Intel Xeon® Gold/Silver 41xx/51xx/61xx Processors Officially Supported Memory Speed (MT/s)</b>		
1 DIMM Per Channel	2400 MT/s	2400 MT/s
2 DIMM Per Channel	2400 MT/s	2400 MT/s
<b>Intel Xeon® Bronze 31xx Processors Officially Supported Memory Speed (MT/s)</b>		
1 DIMM Per Channel	2133 MT/s	2133 MT/s
2 DIMM Per Channel	2133 MT/s	2133 MT/s
<b>HPE Server Memory Speed (MT/s): Intel Xeon® Platinum 81xx Processors *</b>		
1 DIMM Per Channel	2666 MT/s	2666 MT/s
2 DIMM Per Channel	2666 MT/s	2666 MT/s
<b>HPE Server Memory Speed (MT/s): Intel Xeon® Gold/Silver 41xx/51xx/61xx Processors *</b>		
1 DIMM Per Channel	2400	2400
2 DIMM Per Channel	2400	2400
<b>HPE Server Memory Speed (MT/s): Intel Xeon® Bronze 31xx Processors *</b>		
1 DIMM Per Channel	2133 MT/s	2133 MT/s
2 DIMM Per Channel	2133 MT/s	2133 MT/s

**NOTE:** The maximum memory speed is a function of the memory type, memory configuration, and processor model.  
For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

### Standard and Maximum Memory Capacity (Pre-configured Models)

Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
3106	16 GB (1x16 GB RDIMM DR)	384 GB (24x 16 GB)	3072 GB (24x 128 GB)
4114	32 GB (2x16 GB RDIMM DR)	384 GB (24x 16 GB)	3072 GB (24x 128 GB)
5118	64 GB (2x32 GB RDIMM DR)	768 GB (24x 32 GB)	3072 GB (24x 128 GB)
6130	64 GB (2x32 GB RDIMM DR)	768 GB (24x 32 GB)	3072 GB (24x 128 GB)

**NOTE:** 128 GB coming 2H 2017.

### DDR4 memory options part number decoder

**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.

- 8GB = 8,192 MB
- 16GB = 16,384 MB
- 32GB = 32,768 MB
- 64GB = 65,536 MB

For more information on memory, please see the Memory QuickSpecs: [HPE DDR4 SmartMemory](#)

## Storage


### 8 SFF device bay numbering



### 8 SFF + 2 SFF device bay numbering



### 4 LFF device bay numbering




### 10 SFF NVMe/SAS backplane option device bay numbering

**NOTE:** When the 10SFF NVMe/SAS backplane option is installed, NVMe drives must be installed in bays 9 and 10. The other bays support a mix of NVMe and SAS drives.



### Optional rear device bay numbering

**NOTE:** The optional rear device bay supports either 1 SFF drive in a SmartDrive Carrier (SC), or 2 uFF M.2 drives in an HPE SmartCarrier M.2 (SCM). When the HPE SFF Flash Adapter is installed, the uFF drives are recognized as 101 and 102.





## Technical Specifications

### System Unit

<b>Dimensions</b> (Height x Width x Depth)	4.29 x 43.46 x 70.7 cm	SFF Drives
	1.69 x 17.11 x 27.83 in	
	4.29 x 43.46 x 74.98 cm	LFF Drives
	1.69 x 17.11 x 29.5 in	
<b>Weight (approximate)</b>	13.04 kg	SFF minimum: One drive, one processor, one power supply, two heatsinks, one Smart Array controller, and five fans.
	28.74 lb	
	16.27 kg	SFF maximum: 10 drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.
	35.86 lb	
	13.77 kg	LFF minimum: one drive, one processor, one power supply, two heatsinks, one Smart Array controller and five fans.
	30.36 lb	
	16.78 kg	LFF maximum: Four drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.
	37 lb	
<b>Input Requirements</b> (per power supply)	Rated Line Voltage	100 to 120 VAC 200 to 240 VAC
<b>BTU Rating</b>	Maximum	For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VDC) for China Only For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VDC) for China Only
<b>Power Supply Output</b> (per power supply)	Rated Steady-State Power	For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only
	Maximum Peak Power	For 1600W Power Supply: 1600W (at 200 to 240 1VAC), 1600W (at 240 VDC) input for China only
<b>System Inlet Temperature</b>	Standard Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.
		System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
		For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hpe.com/servers/ashrae">http://www.hpe.com/servers/ashrae</a>

## Technical Specifications

Extended Ambient Operating Support

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:  
<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

### Relative Humidity (non-condensing)

Operating	8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.
Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

### Altitude

Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

### Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Configuration SKU	Entry	Base	Performance
<b>Idle</b>			
LWAd	5.1 B	5.1 B	5.2 B
LpAm	32.5 dBA	34.5 dBA	35.9 dBA
<b>Operating</b>			
LWAd	5.3 B	5.2 B	5.9 B
LpAm	35.5 dBA	38.1 dBA	45.1 dBA

**NOTE:** Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

### Emissions Classification (EMC)

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:  
<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

For information on the HPE Smart Array E208i-a SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208i-p SR Gen10 Controller please refer to their [QuickSpecs](#).

For information on the HPE Smart Array E208e-p SR Gen10 Controller please refer to their [QuickSpecs](#).

Technical Specifications

For information on the HPE Smart Array P408i-a SR Gen10 Controller please refer to their [QuickSpecs](#).  
For information on the HPE Smart Array P408i-a SR G10 LH Controller please refer to their [QuickSpecs](#).  
For information on the HPE Smart Array P408i-p SR Gen10 Controller please refer to their [QuickSpecs](#).  
For information on the HPE Smart Array P408e-p SR Gen10 Controller please refer to their [QuickSpecs](#).  
For information on the HPE Smart Array P816i-a SR Gen10 Controller please refer to their [QuickSpecs](#).  
For information on the HPE Smart Array P816i-a SR G10 LH Controller please refer to their [QuickSpecs](#).

Environment-  
friendly Products  
and Approach

End-of-life Management and  
Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs** in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
11-Jul-2017	Version 1	New	New QuickSpecs.



Sign up for updates



© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00008159ENUS - 15929 – North America - V1 - 11-July-2017